

1.25Gb/s SFP Transceiver

SL-SFP-1G-LX

1.25Gb/s SFP Transceiver

SL-SFP-1G-LX

Silicom's SL-SFP-1G-LX Small Form Factor Pluggable (SFP) transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA). The SFP transceivers are high performance, cost effective modules supporting dual data-rate of 1.25Gbps/1.063Gbps and 10km transmission distance with SMF. They are RoHS compliant and lead-free.

Product Features

- ✓ Up to 1.25Gb/s data links
- ✓ Duplex LC connector
- ✓ Hot-pluggable SFP footprint
- ✓ 1310nm FP laser transmitter
- ✓ RoHS compliant and Lead Free
- ✓ Up to 10km on 9/125um SMF
- ✓ Metal enclosure for lower EMI
- ✓ Single +3.3V power supply
- ✓ Low power dissipation <800mW (0~70°C),
- ✓ Commercial operating temperature optional
- ✓ SFP MSA SFF-8074i Compliant

Applications

- ✓ 1000Base-LX
- ✓ 1x Fibre Channel

Product Selection

| Part Number | Operating temperature | DDMI |
|--------------|-----------------------|------|
| SL-SFP-1G-LX | Commercial | Yes |

Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883 Method 3015
- ESD to the Duplex LC Receptacle: compatible with EN 61000-4-2
- Immunity compatible with EN 61000-4-3
- EMI compatible with FCC Part 15 Class B
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 IEC 60950, IEC60825-1,2
- RoHS compliant with RoHS 2.0(2015/863/EU)-amending


Pin Descriptions

| Pin | Symbol | Name | Ref. |
|-----|-------------|--|------|
| 1 | VeeT | Transmitter Ground (Common with Receiver Ground) | 1 |
| 2 | TX Fault | Transmitter Fault. | |
| 3 | TX Disable | Transmitter Disable. Laser output disabled on high or open. | 2 |
| 4 | MOD_DEF(2) | Module Definition 2. Data line for Serial ID. | 3 |
| 5 | MOD_DEF(1) | Module Definition 1. Clock line for Serial ID. | 3 |
| 6 | MOD_DEF(0) | Module Definition 0. Grounded within the module. | 3 |
| 7 | Rate Select | No connection required | |
| 8 | LOS | Loss of Signal indication. Logic 0 indicates normal operation. | 4 |
| 9 | VeeR | Receiver Ground (Common with Transmitter Ground) | 1 |
| 10 | VeeR | Receiver Ground (Common with Transmitter Ground) | 1 |
| 11 | VeeR | Receiver Ground (Common with Transmitter Ground) | 1 |
| 12 | RD- | Receiver Inverted DATA out. AC Coupled | |
| 13 | RD+ | Receiver Non-inverted DATA out. AC Coupled | |
| 14 | VeeR | Receiver Ground (Common with Transmitter Ground) | 1 |
| 15 | VccR | Receiver Power Supply | |
| 16 | VccT | Transmitter Power Supply | |
| 17 | VeeT | Transmitter Ground (Common with Receiver Ground) | 1 |
| 18 | TD+ | Transmitter Non-Inverted DATA in. AC Coupled. | |
| 19 | TD- | Transmitter Inverted DATA in. AC Coupled. | |
| 20 | VeeT | Transmitter Ground (Common with Receiver Ground) | 1 |

Note

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TX Disable >2.0V or open, enabled on TX Disable<0.8V.
3. Should be pulled up with 4.7k - 10kohms on host board to a voltage between 2.0V and 3.6V.
MOD_DEF (0) pulls line low to indicate module is plugged in.
4. LOS is open collector output. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

Pin-out Connector Block on Host Board

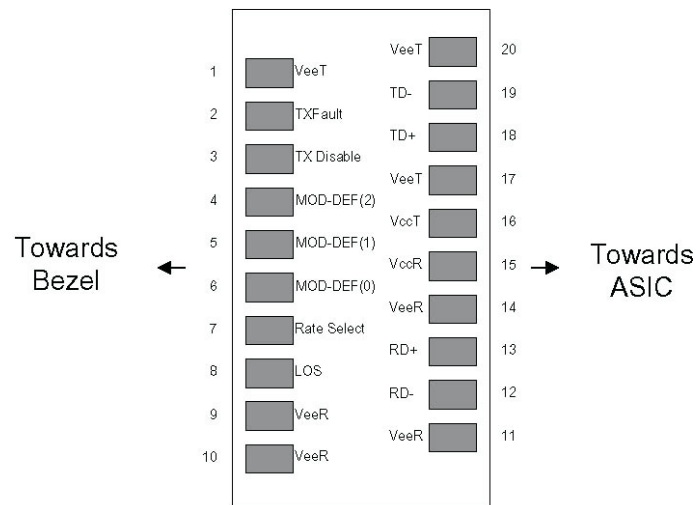

Pin-out of Connector Block on Host Board

Recommended Operating Conditions

| Parameter | Symbol | Min | Typ | Max | Unit | Ref. |
|-----------------------------|--------|------|-------|------|------|------------|
| Power Supply Voltage | Vcc | 3.13 | 3.30 | 3.47 | V | |
| Power Supply Current | Icc | | | 250 | mA | Commercial |
| Case Operating Temperature | Tc | 0 | | +70 | °C | 1 |
| Data Rate(Gigabit Ethernet) | | | 1.25 | | Gbps | |
| Data Rate(Fibre Channel) | | | 1.063 | | Gbps | |
| 9/125um G.652 SMF | Lmax | | | 10 | km | |

Notes:

1.For commercial class product.

Electrical Characteristics

| Parameter | Symbol | Min | Typ | Max | Unit | Ref. |
|--------------------------------|----------|-----------|-----|----------|------|------|
| Transmitter | | | | | | |
| Input differential impedance | Rin | | 100 | - | Ω | 1 |
| Single ended data input swing | Vin, pp | 250 | - | 1200 | mV | |
| TX Disable-High | | Vcc – 1.3 | - | Vcc | V | |
| TX Disable-Low | | Vee | - | Vee+ 0.8 | V | |
| TX Fault-High | | Vcc-0.5 | - | Vcc | V | |
| TX Fault-Low | | Vee | - | Vee+0.5 | V | |
| Receiver | | | | | | |
| Single ended data output swing | Vout, pp | 300 | 400 | 800 | mV | 2 |
| Data output rise time | Tr | - | - | 300 | ps | 3 |
| Data output fall time | Tf | - | - | 300 | ps | 3 |
| LOS-High | - | Vcc – 0.5 | - | Vcc | V | |
| LOS-Low | - | Vee | - | Vee+0.5 | V | |

Notes:

1. AC coupled.
2. Into 100 ohm differential termination.
3. 20 – 80 %

Optical Characteristics


| Parameter | Symbol | Min | Typ | Max | Unit | Ref. |
|---------------------------|-------------|------|------|------|------|------|
| Transmitter | | | | | | |
| Output Opt. Power | PO | -9 | - | -3 | dBm | 1 |
| Optical Wavelength | λ | 1260 | 1310 | 1360 | nm | |
| RMS Spectral Width | σ | - | - | 3 | nm | |
| Optical Rise/Fall Time | tr/ta | - | - | 260 | ps | 2 |
| Total Jitter | TJ | - | - | 0.35 | UI | |
| Optical Extinction Ratio | ER | 9 | - | - | dB | |
| Receiver | | | | | | |
| RX Sensitivity @1.25Gb/s | SENS | - | - | -25 | dBm | 3,4 |
| Receiver Overload | - | -2 | - | - | dBm | |
| Optical Center Wavelength | λ_C | 1270 | - | 1600 | nm | |
| LOS De-Assert | LOSD | - | - | -26 | dBm | |
| LOS Assert | LOSA | -40 | - | - | dBm | |
| LOS Hysteresis | - | 0.5 | - | 5 | dB | |

Notes:

1. Class 1 Laser Safety.
2. Unfiltered, 20-80%. Complies with GE and 1x FC eye masks when filtered.
3. Measured with conformance signals defined in FC-PI-2 Rev. 10.0 specifications.
4. Measured with PRBS 2⁻¹⁷ at 10⁻¹² BER.

Mechanical Specifications


- The Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

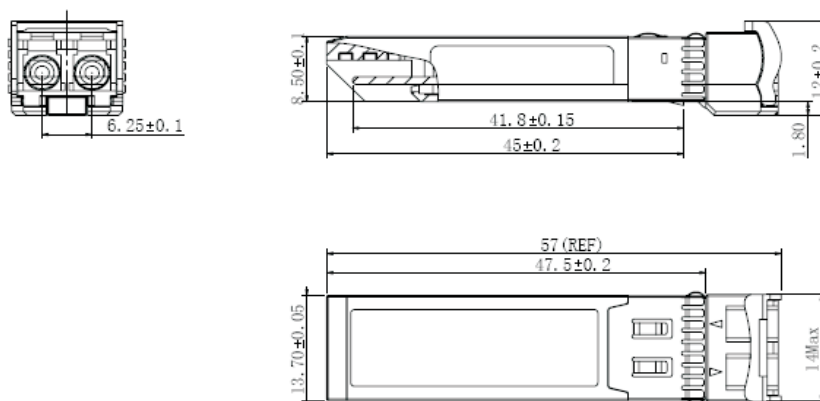

SL-SFP-1G-LX

EEPROM Information

•EEPROM memory map specific data field description is as below:

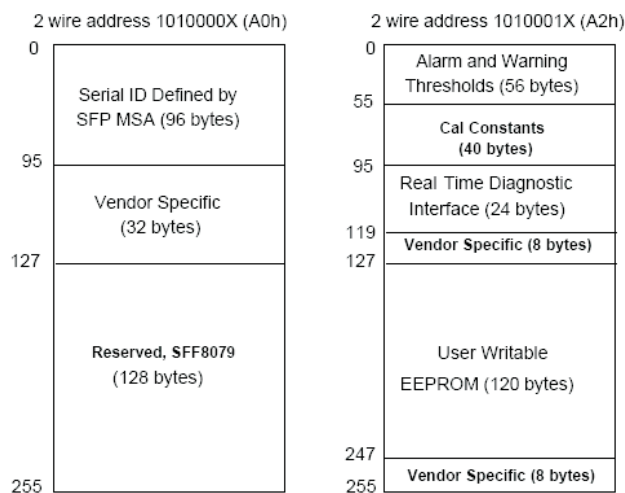

Digital Diagnostic Monitoring Interface

Five transceiver parameter values are monitored. The following table defines the monitored parameter's accuracy.

| Parameter | Range | Accuracy | Calibration |
|--------------|----------------|----------|-------------|
| Temperature | 0 to +70°C (C) | ±3°C | Internal |
| Voltage | 2.97 to 3.63V | ±3% | Internal |
| Bias Current | 0 to 100mA | ±10% | Internal |
| TX Power | -9 to -3dBm | ±3dB | Internal |
| RX Power | -25 to -2dBm | ±3dB | Internal |

Label Information

SFP Label

SL-SFP-1G-LX

1.25G DDM SFP 1310nm 10KM
S/N: APAP22490000002
 Class 1 Laser Product

Tray Package Label



Shipping Mark

